A Moored System to Obtain High-Resolution Time Series of Velocity and Density in High Current Environments

Jonathan D. Nash
College of Oceanic & Atmospheric Sciences
Oregon State University
Corvallis, OR 97331-5503
ph: (541) 737-4573 fx: (541) 737-2064
email: nash@coas.oregonstate.edu

Award #: N00014-10-1-0701 http://mixing.coas.oregonstate.edu/

LONG-TERM GOALS

We seek a more complete and fundamental understanding of the hierarchy of processes that transfer energy and momentum from large scales, feed the internal wavefield, and ultimately dissipate through turbulence. This cascade impacts the acoustic, optical, and biogeochemical properties of the water column, and feeds back to alter the larger scale circulation. Studies within the **Ocean Mixing Group** at OSU emphasize observations, innovative sensor / instrumentation development and integration, and process-oriented internal wave and turbulence modeling for interpretation.



Fig 1: The 16 foot long stablemoor being deployed in Luzon Strait. This is the backbone of the mooring – with 3 ADCPs, 2 CTDs, a turbulence/motion package and satellite communications. It also provides 2000 lbs of buoyancy, so is a mechanical centerpiece for the mooring as well.

OBJECTIVES

Luzon Strait represents a major source of internal tides and NLIWs in the SCS. However, because of the extreme currents and internal wave activity in the Strait, there has been little success in deploying a full-water column mooring in this region. The goal of this project is to obtain a 2-month timeseries of full watercolumn velocity, density and turbulence in the heart of the Strait where internal tide

maintaining the data needed, and c including suggestions for reducing	lection of information is estimated to ompleting and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding ar DMB control number.	ion of information. Send comments arters Services, Directorate for Info	regarding this burden estimate rmation Operations and Reports	or any other aspect of the s, 1215 Jefferson Davis	nis collection of information, Highway, Suite 1204, Arlington	
1. REPORT DATE 30 SEP 2012	2 DEDORT TYPE			3. DATES COVERED 00-00-2012 to 00-00-2012		
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER		
A Moored System to Obtain High-Resolution Time Series of Velocity and Density in High Current Environments				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Oregon State University, College of Oceanic & Atmospheric Sciences, Corvallis, OR, 97331-5503				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAIL Approved for publ	ABILITY STATEMENT ic release; distributi	on unlimited				
13. SUPPLEMENTARY NO	OTES					
14. ABSTRACT						
15. SUBJECT TERMS						
16. SECURITY CLASSIFIC	17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON			
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	Same as Report (SAR)	6		

Report Documentation Page

Form Approved OMB No. 0704-0188 generation is the most intense. This award funded the fabrication/acquisition of a mooring & components deployed in Luzon Strait to:

- identify hotspots of generation and dissipation,
- quantify the structure and time-variability of wave energy, its flux and dissipation at the generation site.
- link the broader spatial structure, temporal content, and energetics of the internal wave field to the topography, forcing, and mesoscale influences (i.e., Kuroshio).

APPROACH

The stablemoor (pictured above) and 4 additional T-chain moorings were successfully deployed and recovered in 2 of the most energetic regions of the strait. Recovery cruises were mid Aug and early Sept, 2011. Data are being analyzed by graduate student Byungho Lim and will form the backbone of his graduate thesis.

WORK COMPLETED

All components of this new mooring were purchased or fabricated. Included on the stablemoor were 2 75 kHz ADCPs (each with 600-700 m range), a 300 kHz ADCP, our in-house fabricated microstructure and motion package (installed in the stablemoor nose), CTD/T-loggers, satellite beacons, flashers etc. Two other turbulence packages were deployed on the mooring wire, along with numerous CTDs, fast-response T-loggers, and an additional ADCP in the surface float. This mooring system thus measures full-water column velocity and density, and also measures temperature microstructure at several discrete locations, permitting dissipation rates of temperature variance (χ) and TKE (ϵ) to be computed.

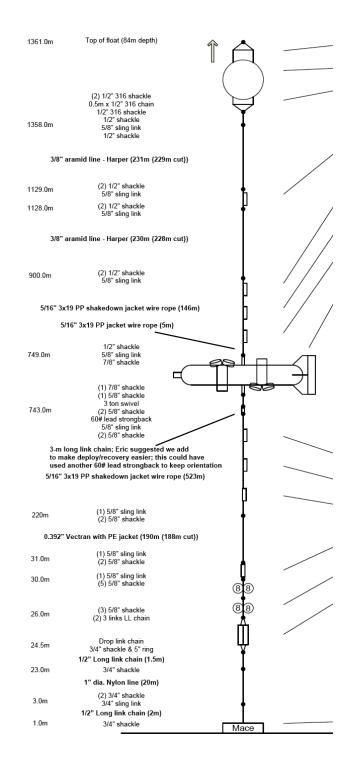


Fig 2: The mooring diagram (right) shows mechanical components. More than 40 C/T sensors were deployed along the wire.

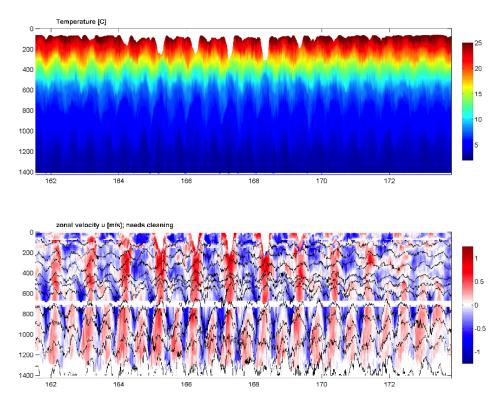


Figure 3: A 12-day record of T (top) and velocity (bottom; with T contoured) from the stablemoor mooring. Time is in yeardays (2011); depth in m. Peak flows and displacements exceed 1 m/s and 300 m.

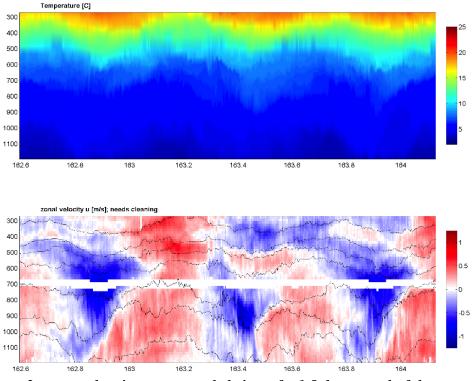


Fig 4: As in Figure 3, except showing an expanded view of a 1.5 day record of the central part of the water column.

RESULTS

All five moorings were deployed in June 2011. The Stablemoor was successfully recovered in Aug from the R/V Revelle, and the remaining 4 T-chains were recovered from the OR1 in Sept. An example of data from the stablemoor is presented in Figures 3 & 4; example data from the 4 T-chains is presented in Fig. 5.

This example represents one 16-h time window within the 3-month deployment. Our objectives are to analyze these records in detail in order to quantify both internal wave and turbulent components. We will combine data from LADCP/xpod, MP-xpods, the moorings shown here, the stablemoor (at A1) and other ancillary moored and model data in these analyses. Ultimately, we will

- 1. characterize the spatial and temporal variability of high-dissipation events
- 2. determine the physics of high-wavenumber generation from the surface and internal tides, and the subsequent breakdown into turbulence
- **3.** assess how these dynamics are related to those which have been numerically modeled, with a goal of understanding whether these can be parameterized.

The data acquired by these instruments will be used extensively in the Graduate Theses of at least 2 students (Byungho Lim (OSU) and Andy Pickering (UW)), and have been made available to all IWISE participants.

RELATED PROJECTS

Profiling and moored operations are being coordinated with M Alford (UW); analysis of turbulence data are being conducted in conjunction with J MacKinnon (UCSD), H Simmons (UAF) and L. St. Laurent (WHOI). Data/model integration and comparisons will be made with Simmons, Klymak, and Buijsman.

REFERENCES

- Klymak, J.N., J.N. Moum, J.D. Nash, E. Kunze, J.B. Girton, G.S. Carter, C.M. Lee, T.B. Sanford, and M.C. Gregg, 2006: An estimate of tidal energy lost to turbulence at the Hawaiian Ridge. *J. Phys. Oceanogr.*, 36, 1148-1164.
- Moum, J.N. and J.D. Nash, 2009: Mixing measurements on an equatorial ocean mooring, *J. Atmos. and Oceanic Tech.*, 26, 317-336.
- Nash, J.D., E. Kunze, C.M. Lee and T.B. Sanford, 2006: Structure of the baroclinic tide generated at Kaena Ridge, Hawaii, *J. Phys. Oceanogr.*, 36(6), 1123-1135.

PUBLICATIONS

Alford, M.H., J.A. MacKinnon, J.D. Nash, H. Simmons, A. Pickering, J.M. Klymak, R. Pinkel, O. Sun, L. Rainville, R. Musgrave, T. Beitzel, K-H Fu and C-W Lu, 2011: Energy flux and dissipation in Luzon Strait: two tales of two ridges. *J. Phys. Oceanogr.* doi: 10.1175/JPO-D-11-073.1 [published]

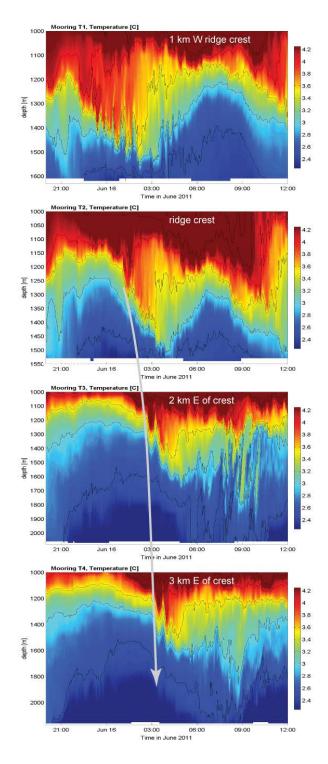


Figure 5: The figure at right shows a 16 h segment of temperature data from the 4 T-chains deployed over the ridge near N2. These moorings were spaced 1 km apart and capture displacements and turbulence in x,z,t space. The depictions at right rival numerical simulations in resolution but capture the represent the true reality and breadth of scales of the real ocean. These figures show the evolution and spatial structure of a 300-m tall wave that grows to 500 m and breaks. Shortwavelength features are coherent across the mooring array and can be tracked (grey arrow). 100-500 m tall turbulent overturns are also visible, particularly at mooring T3 at 0900.